


# PRESSURE FILTER

Series HPX 60 - 150 4568 PSI

Sheet No.  
**1483 B**

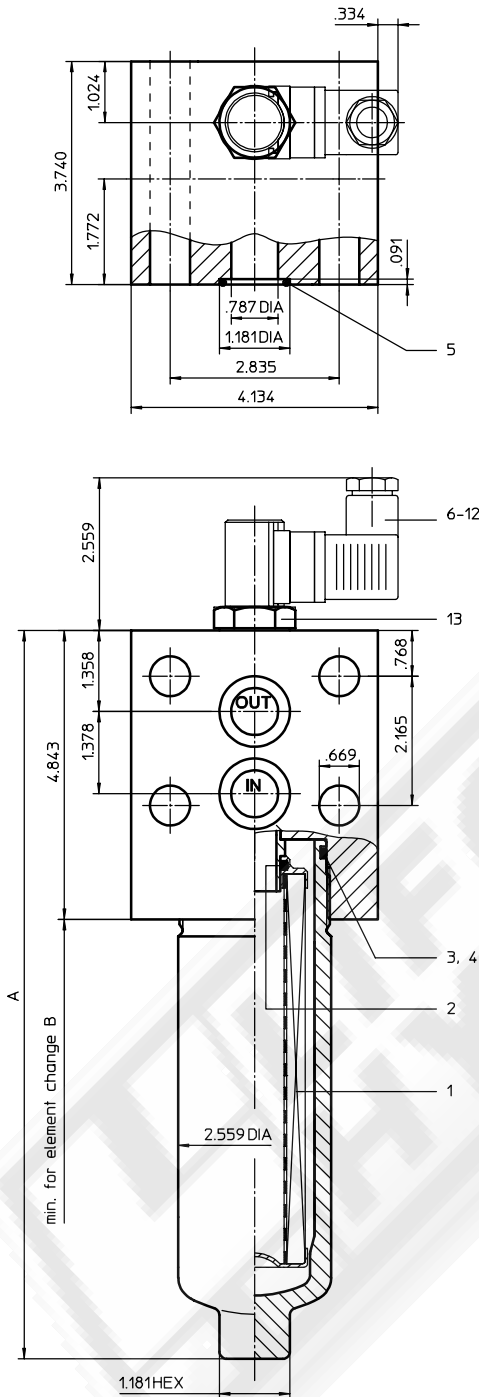

## 2. Dimensions: inch

type	HPX 60	HPX 90	HPX 150
connection	3/4"		
A	9.64	12.20	16.49
B	10.63	13.19	17.52
weight lbs.	20	21	23
volume tank	.08 Gal.	.10 Gal.	.16 Gal.

## 1. Type index:

### 1.1. Complete filter: (ordering example)

**HPX. 90. 10VG. HR. E. P. -. F. 4. -. -. AE**

1	2	3	4	5	6	7	8	9	10	11	12
---	---	---	---	---	---	---	---	---	----	----	----

- 1 **series:**  
HPX = pressure filter
- 2 **nominal size:** 60, 90, 150
- 3 **filter-material and filter-fineness:**  
25 VG = 20  $\mu\text{m}_{(c)}$ , 16 VG = 15  $\mu\text{m}_{(c)}$ , 10 VG = 10  $\mu\text{m}_{(c)}$ ,  
6 VG = 7  $\mu\text{m}_{(c)}$ , 3 VG = 5  $\mu\text{m}_{(c)}$  Interpor fleece (glass fiber)
- 4 **resistance of pressure difference for filter element:**  
30 =  $\Delta p$  435 PSI  
HR =  $\Delta p$  2320 PSI (rupture strength  $\Delta p$  3625 PSI)
- 5 **filter element design:**  
E = single-end open
- 6 **sealing material:**  
P = Nitrile (NBR)  
V = Viton (FPM)
- 7 **filter element specification:** (see catalog)  
- = standard  
VA = stainless steel  
IS06 = see sheet-no. 31601
- 8 **connection:**  
F = manifold mounted
- 9 **connection size:**  
4 = 3/4"
- 10 **filter housing specification:** (see catalog)  
- = standard  
IS06 = see sheet-no. 31605
- 11 **internal valve:**  
- = without  
S1 = with by-pass valve  $\Delta p$  51 PSI  
S2 = with by-pass valve  $\Delta p$  102 PSI  
R = reversing valve, Q  $\leq$  18.50 GPM
- 12 **clogging indicator or clogging sensor:**  
- = without  
AOR = visual, see sheet-no. 1606  
AOC = visual, see sheet-no. 1606  
AE = visual-electrical, see sheet-no. 1615  
VS1 = electronical, see sheet-no. 1617  
VS2 = electronical, see sheet-no. 1618

### 1.2. Filter element: (ordering example)

**01E. 90. 10VG. HR. E. P. -**

1	2	3	4	5	6	7
---	---	---	---	---	---	---

- 1 **series:**  
01E. = filter element according to INTERNORMEN factory specification
- 2 **nominal size:** 60, 90, 150
- 3 - 7 see type index-complete filter

Changes of measures and design are subject to alteration!

EDV 07/03

### 3. Spare parts:

item	qty.	designation	dimension HPX 60 - 150	article-no.	
1	1	filter element	01E. 60 - 150		
2	1	O-ring	22 x 3,5	304341 (NBR)	304392 (FPM)
3	1	O-ring	54 x 3	304657 (NBR)	304720 (FPM)
4	1	support ring	61 x 2,6 x 1	304660	
5	2	O-ring	24 x 3	303038 (NBR)	304397 (FPM)
6	1	clogging indicator, visual	AOR or AOC	see sheet-no. 1606	
7	1	clogging indicator, visual-electrical	AE	see sheet-no. 1615	
8	1	clogging sensor, electronical	VS1	see sheet-no. 1617	
9	1	clogging sensor, electronical	VS2	see sheet-no. 1618	
10	1	O-ring	15 x 1,5	315357 (NBR)	315427 (FPM)
11	1	O-ring	22 x 2	304708 (NBR)	304721 (FPM)
12	1	O-ring	14 x 2	304342 (NBR)	304722 (FPM)
13	1	screw plug	20913-4	309817	

item 13 execution only without clogging indicator or clogging sensor

### 4. Description:


The pressure filters of the series HPX 60-150 are suitable for a working pressure up to 4568 bar. The pressure peaks are absorbed by a sufficient margin of safety. The HPX-filter are flanged to the mounting face. The filter element consists of star-shaped, pleated filter material which is supported on the inside by a perforated core tube and is bonded to the end caps with a high-quality adhesive. The flow direction is from outside to the inside. Filter elements are available down to 4 µm<sub>(c)</sub>. INTERNORMEN-Filter elements are known as elements with a high intrinsic stability and an excellent filtration capability, a high dirt-retaining capacity and a long service life. INTERNORMEN-Filter are suitable for all petroleum based fluids, HW-emulsions, most synthetic hydraulic fluids and lubrication oils. INTERNORMEN-Filter elements are available up to a pressure difference resistance of Δp 2320 PSI and a rupture strength of Δp 3625 PSI. The internal valves are integrated into the centering pivot for the filter element. After reaching the opening pressure the by-pass valve causes that an unfiltered partial flow passes the filter. With the reverse valve a protection of the filter element is given when having a reverse flow inside the filter. The reverse flow will not be filtered.

### 5. Technical data:

temperature range:	+14°F to + 176°F (for a short time + 212°F)
operating medium:	mineral oil, other media on request
max. operating pressure:	4568 PSI
test pressure:	5945 PSI
connection system:	manifold mounted
housing material:	C-steel
sealing material:	Nitrile (NBR) or Viton (FPM), other materials on request
installation position:	vertical

Classified under the Pressure Vessel Directive 97/23/EC for mineral oil (fluid group 2), Article 3, Para. 3.  
Classified under ATEX Directive 94/9/EC according to specific application (see questionnaire sheet-no. 34279-4).

### 6. Symbols:

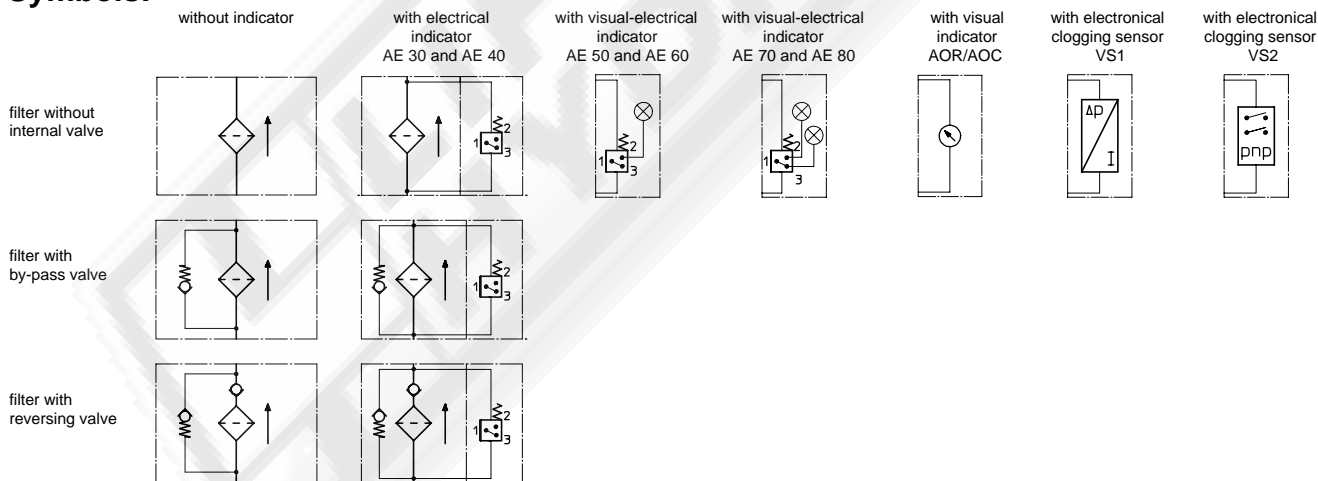

**7. Pressure drop flow curves:** Precise flow rates see 'INF-Expert-System Filter', respectively Δp-curves; depending on filter fineness and viscosity.

**8. Test methods:** Filter elements are tested according to the following ISO standards:

- ISO 2941 Verification of collapse/burst resistance
- ISO 2942 Verification of fabrication integrity
- ISO 2943 Verification of material compatibility with fluids
- ISO 3723 Method for end load test
- ISO 3724 Verification of flow fatigue characteristics
- ISO 3968 Evaluation of pressure drop versus flow characteristics
- ISO 16889 Multi-pass method for evaluating filtration performance